

LINK-STICK

CRMX receiver and Bluetooth app adapter

LINK-STICK combines a built-in CRMX and W-DMX receiver with Bluetooth 5 and Vision Control app operation. Its 5-pin female XLR connection, rechargeable 2500 mAh battery and USB-C charging support compact indoor setups. The compact 260 g XLR version combines a CRMX receiver with a built-in Bluetooth bridge for app control. The stated range is up to 100 m, with latency below 5 ms. Battery charging takes approximately three hours. The IP20 design suits indoor lighting setups where a small wireless interface is easier to position than a larger receiver.



CONTROL & CREATIVE OPTIONS

Bluetooth 5.0

INSTALLATION & CONNECTION

USB-C / 5 V DC / 2 A




PRODUCT DETAIL




0.26 kg

WEIGHT




IP20

IP RATING




3 h

CHARGING




<5 ms

LATENCY



Up to 100 m

RANGE



Built-in BTB

BLUETOOTH BRIDGE



LINK SERIES / EXTENDED SPECIFICATION

Technical specifications

Optics, effects, control, electrical and physical details.

OPTICS

Bluetooth bridge	Built-in BTB
Bluetooth range	Up to 100 m
Microphone	Built-in
Operating range	0-40°C

CONTROL

App	Vision Control with RDM
Wireless protocol	Bluetooth 5.0
DMX connection	5-pin female XLR
Controls	Power / clear buttons
Wireless DMX	CRMXchip / CRMX / W-DMX receiver
Wireless range · W-DMX	Up to 400 m
Wireless range · Bluetooth	Up to 100 m
DMX channels	512
DMX latency	<5 ms
BLE sensitivity · 125 kbps	-103 dBm
BLE sensitivity · 1 Mbps	-95 dBm
W-DMX compatibility	G3 / G4S / FHSS 1100 hops/s
Vision Control workflow	Scenes / groups / colour / intensity / dynamic effects from phone or tablet

ELECTRICAL

Battery	Li-ion / 3.7 V / 2500 mAh
Charging input	USB-C / 5 V DC / 2 A
Charging time	3 h
Battery runtime	Up to 80 h / app or wireless mode

PHYSICAL

Protection	IP20
------------	------

PHYSICAL

Housing	Plastic
Dimensions · L/W/D	120 × 34 × 29 mm
Weight	0.26 kg
Optional package case	ABS case / 12 units
Length	120 mm
Housing material	Black ABS
Status display	LED indicators



LINK SERIES / EXTENDED SPECIFICATION

Vision Control


One app. Flexible connections. More room to create.



YOUR LIGHT. FROM WHERE YOU ARE.

Adjust colour and intensity, recall scenes, organise groups and run dynamic effects from your phone or tablet.

LINK-HUB can feed a fixture directly from DMX OUT. Add LINK-STICK receivers to extend control to more DMX fixtures.

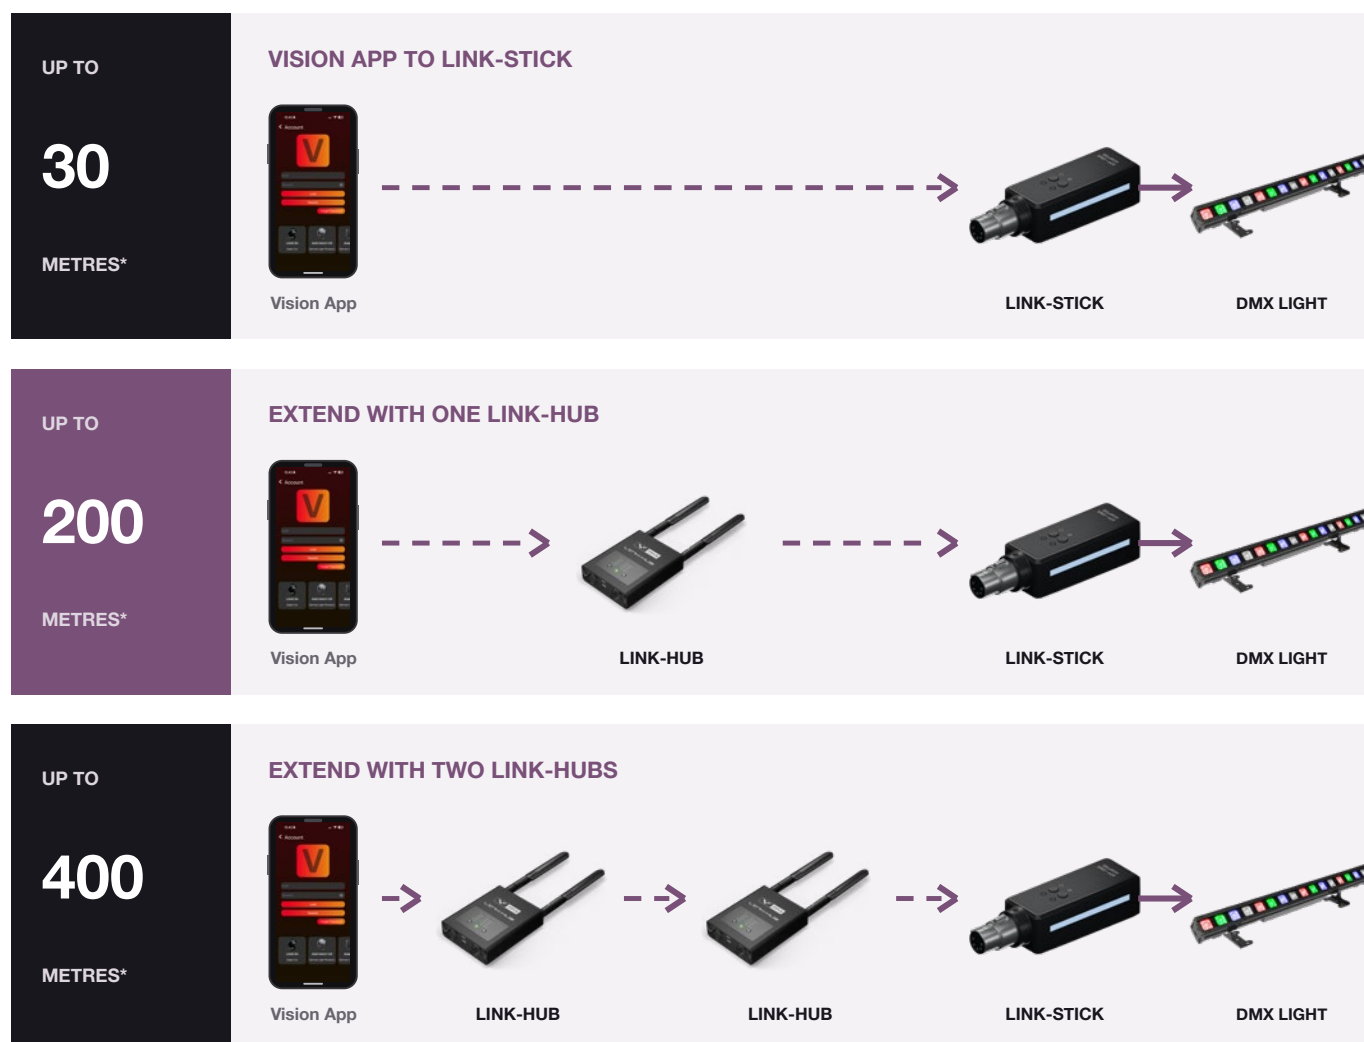

*Open-field range with clear line of sight. Actual coverage depends on model, mobile device, antenna orientation, obstacles and radio interference.

LINK SERIES / EXTENDED SPECIFICATION

Universal DMX control

One LINK-STICK. Your choice of compatible DMX fixture.

Bring DMX lighting into Vision Control through LINK-STICK. Use the app to organise your rig, patch fixtures and create looks. LINK-HUB can also control fixtures directly through its DMX OUT; add LINK-STICK receivers to expand your setup.



CONTROL YOUR LIGHTS

Connect LINK-STICK to the DMX input. Select a matching fixture profile and DMX mode to access the controls supported by the fixture.

PATCH & ORGANISE

Set up fixtures, DMX addresses and modes in your patch. Organise groups and scenes for quick access during your event.

RDM MANAGEMENT

Use RDM management with compatible fixtures to access supported device settings. Available parameters depend on the connected fixture.

Dashed arrows: wireless connection. Solid arrows: physical DMX connection. FALCON BAR400 and FX400 are examples; LINK-STICK is not limited to these models.

LINK SERIES / EXTENDED SPECIFICATION

Accessories & installation

Product-specific options, mounting and supporting product views.

Optional package case

ABS case / 12 units

