



UP

4X15W RGBWA Battery-Powered LED Uplight

The Eagle Lite UP is a battery-powered, compact RGBWA uplight featuring four 15W LEDs and a 25° beam angle for crisp and efficient wall washing. With amber integration, it delivers strong color saturation, warm tones, and smooth dimming curves for professional-grade results. Operating silently with passive cooling, it offers up to 19 hours of runtime on a single charge and fully recharges in 6 hours via TrueCon/PowerCon IN. The fixture supports wireless DMX (2.4 GHz), standalone, auto, Master/Slave control, and IR remote for quick setup and operation in dynamic environments. Its IP20-rated housing is ideal for indoor events, while the included remote and optional charging flightcase enhance workflow efficiency. The Eagle Lite UP is perfect for event lighting, rentals, and uplighting applications requiring flexibility and reliability.

- 4 x 15W 5-in-1 RGBWA LED Chips
- Up to 19h Battery Operation
- Linear Dimming w/ 4 Dimmer Curves
- 25° Beam Angle | 40° Field Angle
- 2.4GHz Wireless DMX + IR Remote
- Virtual Color Gel Presets
- 5ch & 9ch DMX Modes
- Auto, Master/Slave, and Standalone Modes!
- Passive Cooling – Silent Operation
- Compact IP20 Housing
- Self-Standing Base with M10 Mount
- LCD Display for Easy Setup
- Color Macros & Strobe FX
- AC Power Operation via TRUE1 IN/THRU Connection
- Quick Recharge – Fully in 6h
- Lightweight – Just 3.5 kg

RGBWA Color Mixing



LED 4X15W	 WIRELESS DMX 2.4 Ghz
 IR REMOTE	 DMX/RDM
 IP20	 LITHIUM BATTERY
UK CA	CE



SPECIFICATION SHEET

OPTICAL PARAMETERS

Source:	4 × 15W RGBWA 5-in-1 LED
Source Life Expectancy:	50,000 Hours
Beam Angle:	25°
Field Angle:	40°
Color Mix	RGBWA Color mix

DYNAMIC EFFECTS

Dimming Resolution:	8-bit Dimming
Dimmer Curves:	Linear, Exponential, Logarithmic, S-Curve
Stand-Alone Mode:	Selection of Static Color
Built-in Automated Programs:	Yes
Sound Active Mode:	Yes
Master/Slave Mode:	Wired or Wireless
Shutter/Strobe:	1 – 20 Hz
User Modes:	Static Color, Color Fade, Sound, Auto Run

ELECTRICAL

Power Supply:	100-240V – 50/60Hz
Max Power Consumption:	50W / 0.21A @ 230V
Power factor:	>0.95
Battery size:	12.6V / 8800mAh
Charge time:	6 hours
Max run time:	Up to 19h (1 color active) / 9h (Color fade)
Power connections:	Seetronic True1 IN/OUT & Quick Charger

PHYSICAL

Ingress Protection Rating:	IP20, Indoor use only
Cooling System:	Passive convection (fanless)
Signal connection:	3-Pin XLR IN/THRU
Power connection:	Seetronic True1 IP20
Dimensions (WxHxD)mm:	138 x 210 x 138
Weight:	3.6kg
Housing Material:	Metal
Color/Finish:	Black / White(Optional)
Form Factor:	Compact uplight design
Mounting:	Floor-standing or M10 mount
LED Indicators:	For battery and mode status

COLOR SYSTEM

Color Mixing:	RGBWA – 5-in-1
Color Presets:	12 color macros
Color Change Mode:	Yes (fade / step)
Macros:	Built-In Color Scroll/Fade with Speed Adjustment

CONTROL

Protocols:	DMX512, Wireless DMX 2.4 Ghz, IR Remote
DMX channels:	5 & 9ch
Wireless:	Wireless DMX 2.4Ghz (own protocol)
Display:	LCD Display
Control Modes:	DMX512 / Auto / Sound / Master-Slave / IR Remote

OPTIONAL ACCESSORIES:

Silent Operation:	Fanless cooling
All-in-One:	Battery-powered, wireless, and portable
Flightcase Charging:	Optional 6-in-1 flightcase w/ charging system
IR Remote Included:	For easy on-site adjustments
Quick Plug-in:	TRUE1-compatible PowerCON for fast AC charge
Color Versatility:	Ideal for uplighting, ambiance, or mobile setups
Easy Deployment:	Setup without cables – perfect for fast installs
Power Management:	Long-lasting runtime for full-day events







**EAGLE
LITE**

UP

4X15W RGBWA Battery-Powered LED Uplight

SIZE

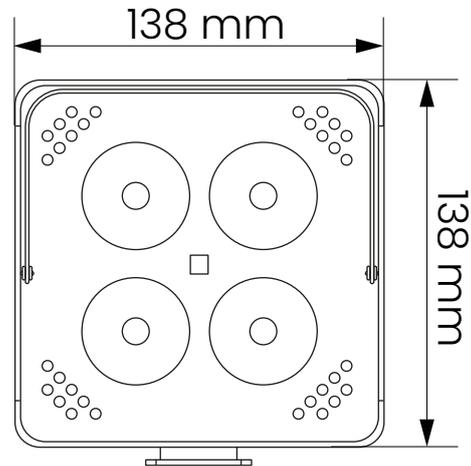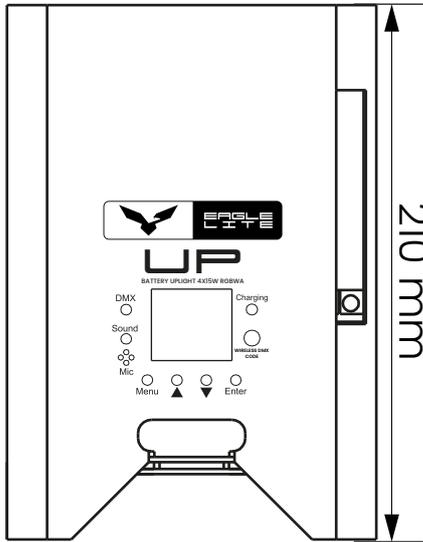

ACCESSORIES



CHARGING CASE 6IN1



RAINCOVER



WIRELESS DMX BOX